


Installation / Operation / Maintenance

Nuclecel® End-of-Line Ionizers Models P-2031 and P-2031SS

Usage

The Nuclecel® End-of-Line Ionizers neutralize static charges and remove dust and other foreign particulate by providing a powerful stream of ionized gas across affected parts. They are designed for applications where a high volume of gas at low pressure is desirable. The Model P-2031SS is for usage where stainless construction is important.

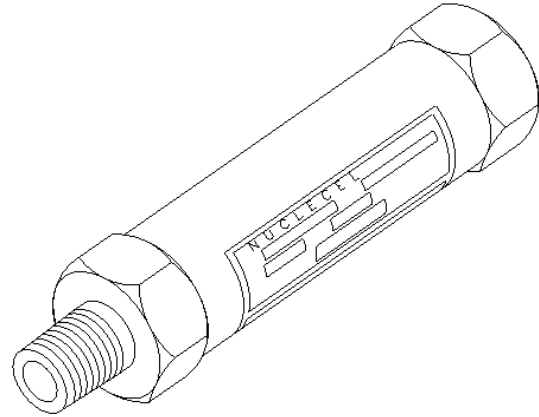

Installation & Operation

1. The Nuclecel® End-of-Line Ionizer can be operated with the flow of gas in either direction. One end of the Ionizer is equipped to connect to a 1/4" NPT male fitting and the other end to a 1/4" NPT female fitting. Provide either fitting at the end of the gas supply hose to be connected to the Ionizer. The gas can be air or an inert gas.

Note: Ensure that the gas supply is properly filtered and that attached hoses are clean and dry.
2. Attach the Ionizer to the 1/4" NPT hose fitting and tighten securely.
3. Position the Ionizer as desired.
4. Apply gas pressure and regulate it to the desired level. Do not exceed an inlet pressure of 100 psig. A powerful stream of ionized gas will flow over objects and quickly neutralize electrostatic charges and remove dust and other foreign particulate clinging due to static attraction.
5. To ensure maximum static removal efficiency, the Ionizer must be replaced annually regardless of use. The replacement date is one year after the date manufactured (printed on each Ionizer). NRD will remind customers of the replacement date.



NRD, LLC / 2937 Alt Boulevard / Grand Island, NY 14072
PHONE 716 773 7634 / FAX 716 773 7744 / EMAIL sales@nrdlc.com / WEB www.nrdllc.com

NRD Asia Pte. Ltd
PHONE +65 6679 1707 / EMAIL sales@NRDAsia.com / WEB www.nrdllc.com

Trouble Shooting Guide

| Symptom | Probable Causes | Corrective Action |
|--------------------------------------|---|--|
| 1. Static charges are not eliminated | Ionizer may be out of date and need replacement | Call NRD for a replacement Ionizer |
| 2. Air flow is reduced | Upstream filter(s) are plugged and/or gas pressure is low | Replace upstream filter(s) and/or increase gas pressure (100 psig maximum) |

**For additional assistance call NRD Customer Service toll-free at
1-800-525-8076**

Limited Warranty

NRD expressly warrants that for a period of one (1) year from the time of purchase, the item will be free of defects in material (parts) and workmanship (labor). Within the warranty period, the item will be tested, repaired, or replaced at discretion of NRD, free of charge. Any item under warranty should be shipped prepaid to the NRD factory. Call Customer Service at (716) 773-7634 for a Return Authorization number and shipping instructions. Include a copy of your original packing slip, invoice, or other proof of purchase date.

If the item is out of warranty, NRD LLC will quote repair charges necessary to bring your item up to factory standards.

Warranty Exclusions

The forgoing express warranty is made in lieu of all other product warranties, expressed and implied, including merchantability and fitness for a particular purpose that is specifically disclaimed. The express warranty will not apply to defects or damage due to accidents, neglect, misuse, alterations, operator error, or failure to properly maintain, clean or repair products.

Limit of Liability

The user shall determine the suitability of the product for their intended use, and the user assumes all risk and liability whatsoever in connection therein.



NRD, LLC / 2937 Alt Boulevard / Grand Island, NY 14072
PHONE 716 773 7634 / FAX 716 773 7744 / EMAIL sales@nrdllc.com / WEB www.nrdllc.com

NRD Asia Pte. Ltd
PHONE +65 6679 1707 / EMAIL sales@NRDAsia.com / WEB www.nrdllc.com